


This information is confidential and proprietary to ZAWARD.
 And shall not be reproduced or further disclosed to anyone other than
 ZAWARD employees without prior written consent from ZAWARD.
 Any uncontrolled printed copy of this document is for reference purpose
 only unless expressly authorized by ZAWARD.
 Authorization must include number and revision.

REVISIONS		
REV.	DESCRIPTION	DATE
A	Formal Release	20110714

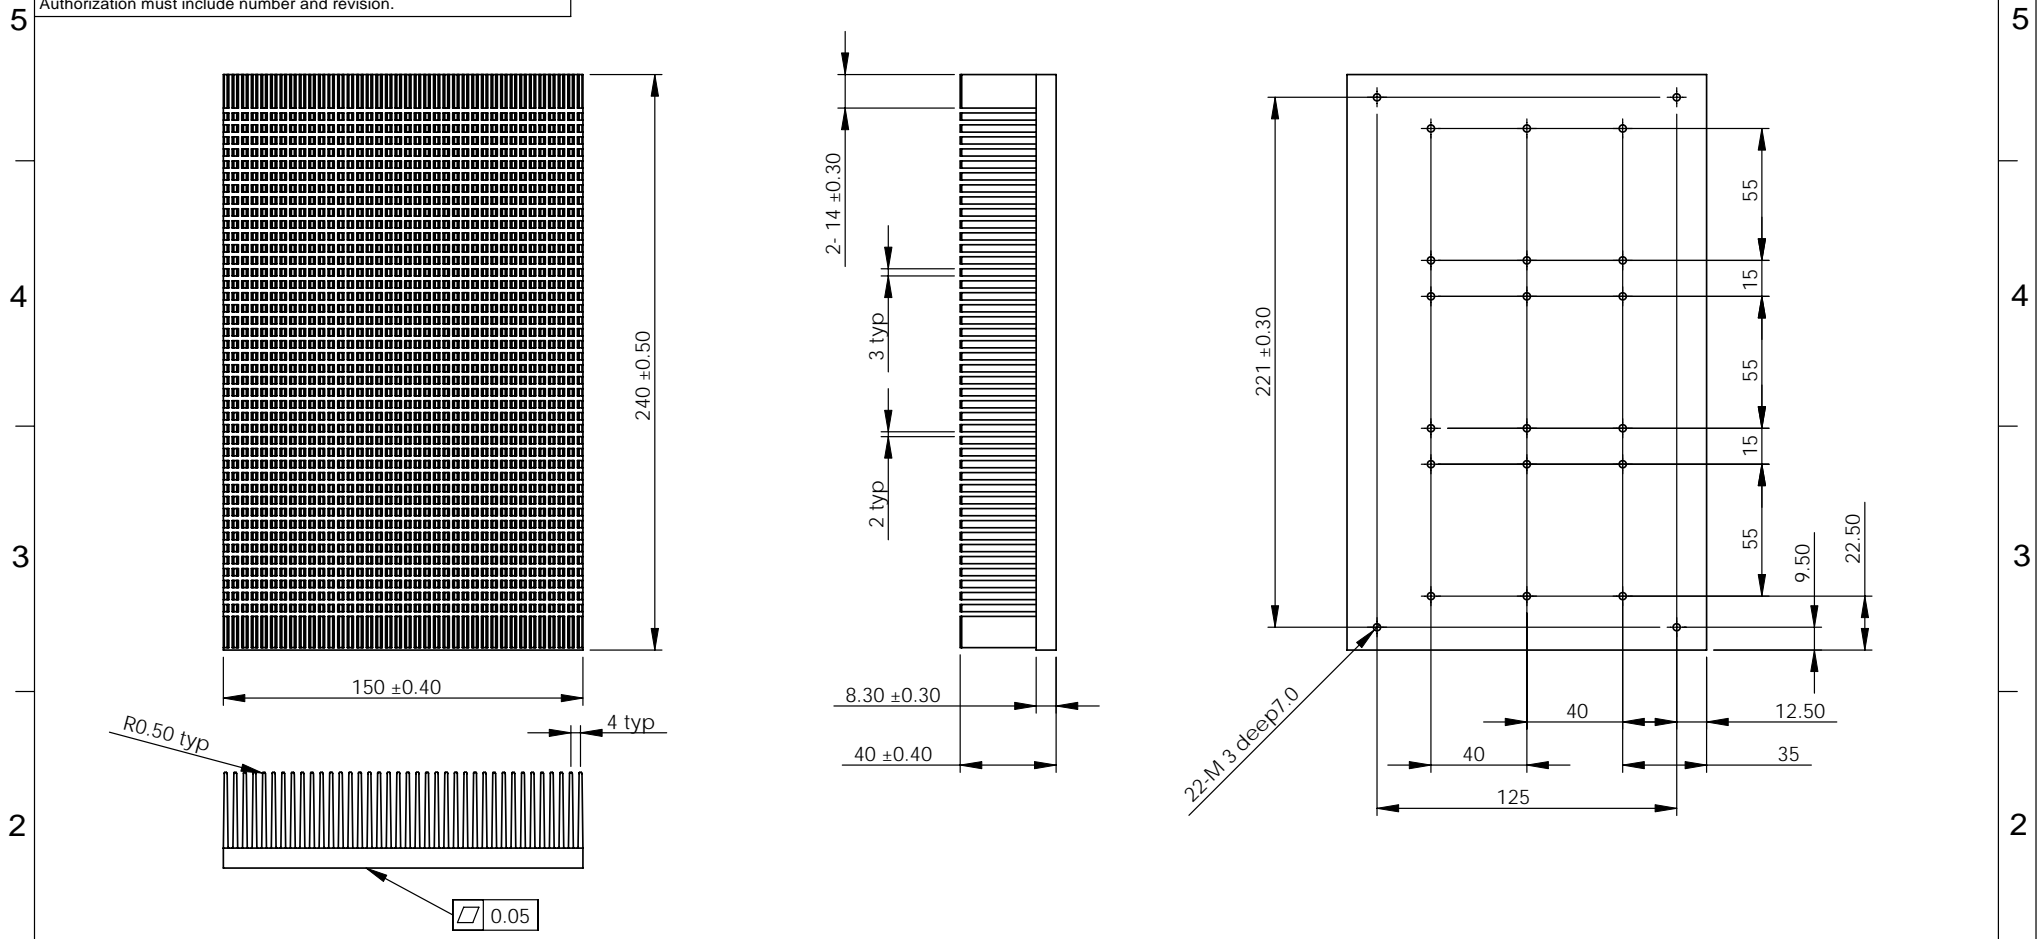

Note:

1. Material: AL6063-T5, Thermal conductivity 209W/Mk.
2. Surface treatment: clean anodized.
3. Surface does not allow scratches, burrs, oils.
4. R angle is less than 0.3 if without noted.
5. All parts must be free of burrs.
6. All parts are ROHS compliance.

GENERAL TOLERANCE, ALL DIMENSIONS ARE IN mm		
DIMENSIONS	METAL TOLERANCE	RESIN ASSEMBLY TOLERANCE
Over 316	±0.80	±1.20
121-315	±0.50	±0.80
31-120	±0.30	±0.50
0-30	±0.20	±0.30
ANGLES	0.3°	0.3°



ZAWARD CORPORATION

PART NO.	40EC150L240C	PART TITLE	hestsink		
MATERIAL	AL6063-T5	FINISH	clean anodized	SCALE	1:5
SIZE	A4	RoHs	YES	DATE	07/14/2011
SHEET	1/1	WEIGHT(g)	-	REFERABLE	-
VIEW	mm	REV.	A		

APPROVED	Carmen	CHECKED	Regina	DRAWN	Gary	VIEW		mm
----------	--------	---------	--------	-------	------	------	--	----

A B C D E F G