


This information is confidential and proprietary to ZAWARD. And shall not be reproduced or further disclosed to anyone other than ZAWARD employees without prior written consent from ZAWARD. Any uncontrolled printed copy of this document is for reference purpose only unless expressly authorized by ZAWARD. Authorization must include number and revision.


06015 : 60*60*15(2.36"*2.36"*0.59")

REVISIONS		
REV.	DESCRIPTION	DATE
△	Formal Release.	2011/3/30

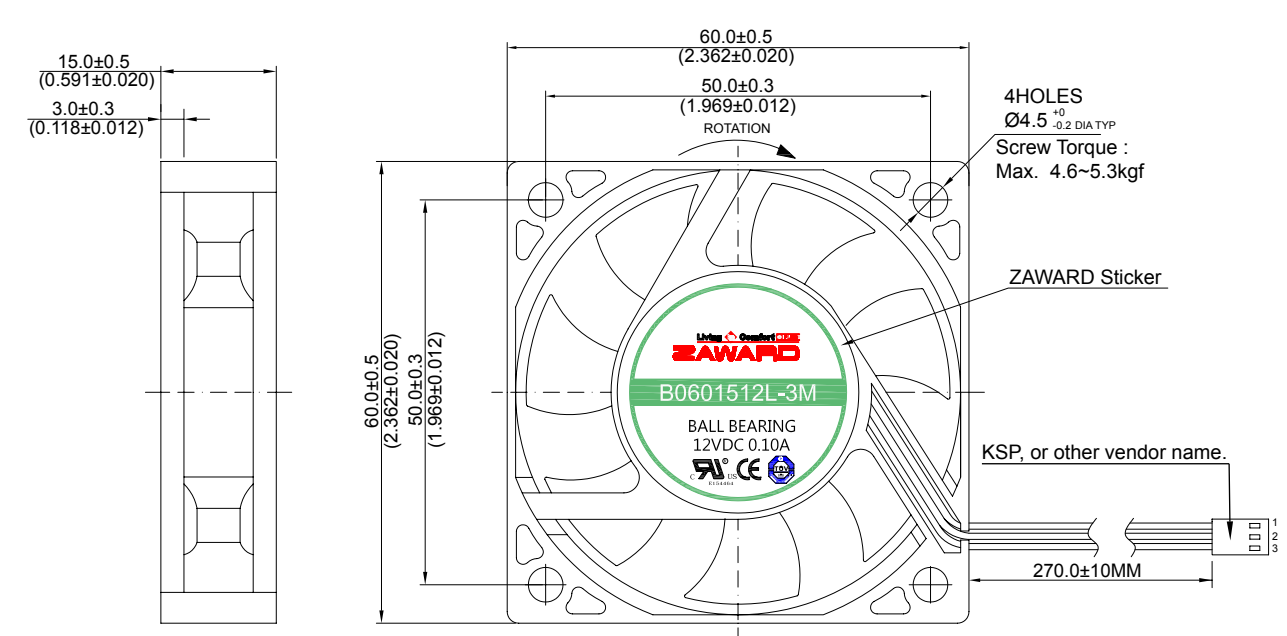


ELECTRICAL		
Item	Specification Conditions	
Rated Voltage	12	VDC
Operating Voltage	6~13.8	VDC
Starting Voltage	6.0	VDC
Consumption Current	0.10	Max. Amp at 12VDC
Rated Input Power	1.20	Max. Watt at 12VDC
Rated Speed	3500	RPM±10%
Max. Air Flow	14.12	Max. CFM
Max. Static Pressure	2.41	Max. mmAq
Noise Value	23.9	dBA
Operating Temp	-10°C to +70°C	
Storage Temp	-40°C to +90°C	
Insulation Resistance	>10MΩ	
Dielectric Strength	500VAC/1min, 600VAC/1sec/1mA	

MECHANICAL		
Item	Specification Conditions	
Blade Material	Thermo plastic PBT GF 15%, Class UL 94V-0	
Frame Material	Thermo plastic PBT GF 30%, Class UL 94V-0	
Frame Type	Ribbed(4 holes)	
Signal Output	FG	Frequency Generator
Connection Lead Type	Terminal Connector	
Rotation Direction	CCW	Counter-clockwise viewed from inlet
Air Flow Direction	ETV	Air exhaust through ventilator
Bearing Type	2 Balls	
Net Weight	40.40	Gram
Packing	--- X --- X --- mm, 4.04kg/CTN	
	100	PCS/CTN

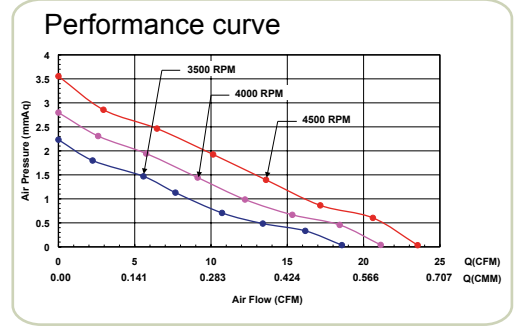

FEATURES	
Item	Specification Conditions
Locked Rotor Protection	Yes (Auto-Restart)
Polarity Protection	Yes
Life Expectancy	70,000 Hours at 40°C 15~65% R.H.
Approvals	UL : E154464 ,TUV : 45391 ,CE
Functions	

Housing drawing (SCALE :1.5:1)



PIN	Function / Color
1	-GND, BLACK
2	+12V, RED
3	Signal, WHITE
Connector Housing	Equivalent of Molex or KSP
Connector Pin	2510/22-01-3037

ZAWARD CORPORATION

MODEL NO.	B0601512L-3M(RoHS)			
PART TITLE	DC Axial Fan	SCALE	1.5:1	
SIZE	SHEET	RoHS	REFERABLE	DATE
A4	1/1	Yes	566111030(FS-7592)	2011.3.30
			REV.	0.00

APPROVED Carmen CHECKED Regina DRAWN Daniel VIEW mm